


Specifications

Size of module	766x674x30mm
Cell Type	POLY CELL 78x156mm
Number of cells	36(4x9)
Maximum Power(Wp)	75W
Tolerance of Power(%)	±3%
Open circuit Voltage(Voc)	22.7V
Short circuit Current(Isc)	4.34A
Maximum Power Voltage(Vm)	18.3V
Maximum Power Current(I _m)	4.10A
Maximum Series Fuse	0A
Number of Diode	2
Cable type and Length	without cable
Standard Test Conditions	1000W/M ² , 25 °C, AM1.5
Maximum System Voltage	1000V/DC
Temperature-Coefficient I _{sc}	+0.08558%/°C
Temperature-Coefficient U _{oc}	-0.29506%/°C
Temperature-Coefficient P _{mp}	-0.38001%/°C
Normal Operating Cell Temperature	45 °C
Module efficiency	14.5%
Product Certificate	TUV(IEC 61215, IEC 61730), CE, ROHS
Company Certificate	ISO9001, ISO14001, ISO18001



ERA SOLAR and the ERA SOLAR logo are trademarks or registered trademarks of ERA SOLAR Corporation. September 2016 ERA SOLAR Corporation. All rights reserved. Specifications included in this datasheet are subject to change without notice.

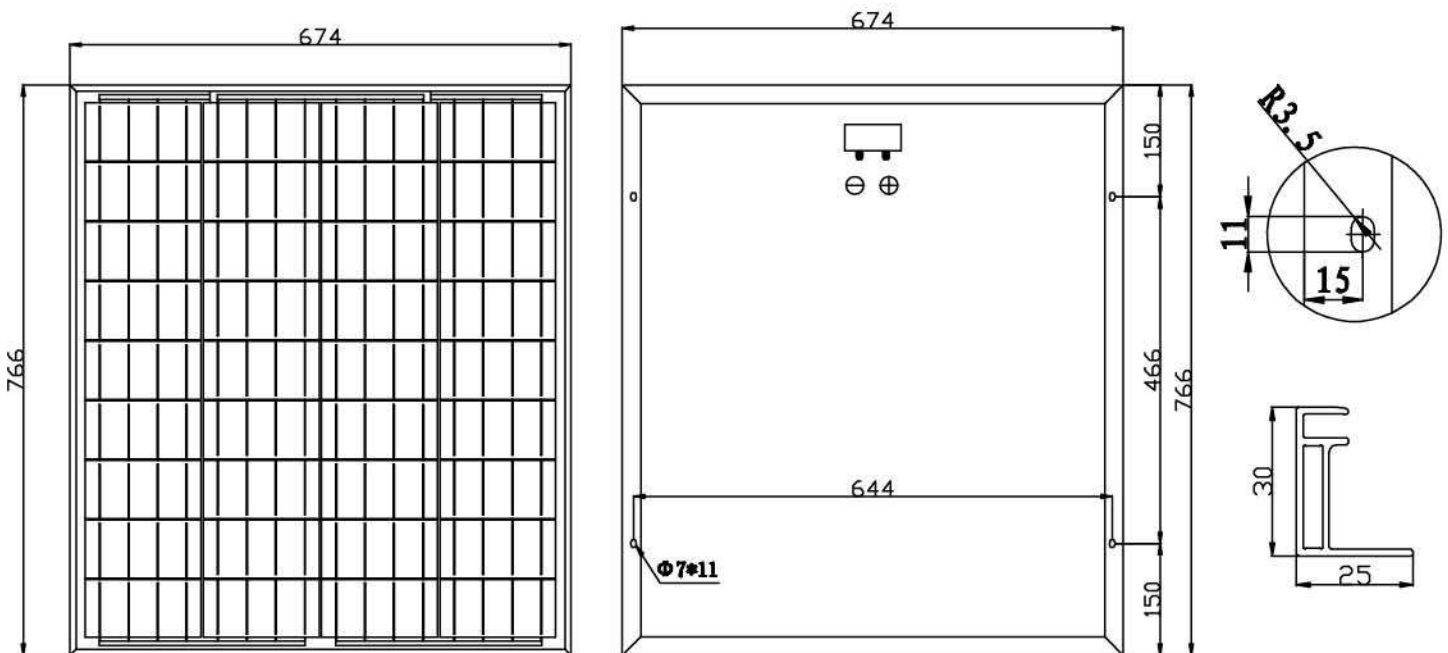