

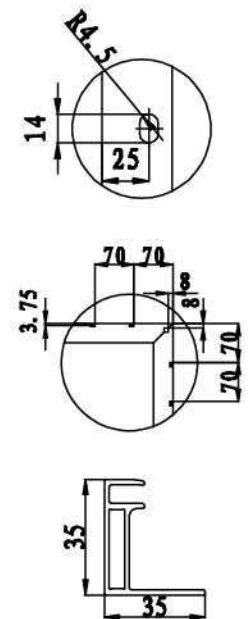


Specifications

Size of module	1482x676x35mm
Cell Type	POLY CELL 156x156mm
Number of cells	36(4x9)
Maximum Power(Wp)	150W
Tolerance of Power(%)	±3%
Open circuit Voltage(Voc)	22.7V
Short circuit Current(Isc)	8.69A
Maximum Power Voltage(Vm)	18.3V
Maximum Power Current(I _m)	8.20A
Maximum Series Fuse	10A
Number of Diode	2
Cable type and Length	4mm ² ,90cm
Standard Test Conditions	1000W/M ² ,25 °C ,AM1.5
Maximum System Voltage	1000V/DC
Temperature-Coefficient I _{sc}	+0.08558%/°C
Temperature-Coefficient U _{oc}	-0.29506%/°C
Temperature-Coefficient P _{mp}	-0.38001%/°C
Normal Operating Cell Temperature	45 °C
Module efficiency	15.0%
Product Certificate	TUV(IEC 61215,IEC 61730),CE,ROHS
Company Certificate	ISO9001,ISO14001,ISO18001

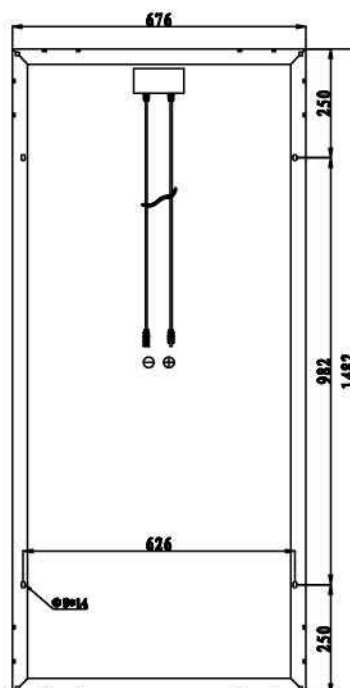

ERA SOLAR and the ERA SOLAR logo are trademarks or registered trademarks of ERA SOLAR Corporation.
 September 2016 ERA SOLAR Corporation. All rights reserved. Specifications included in this datasheet are subject to change without notice.

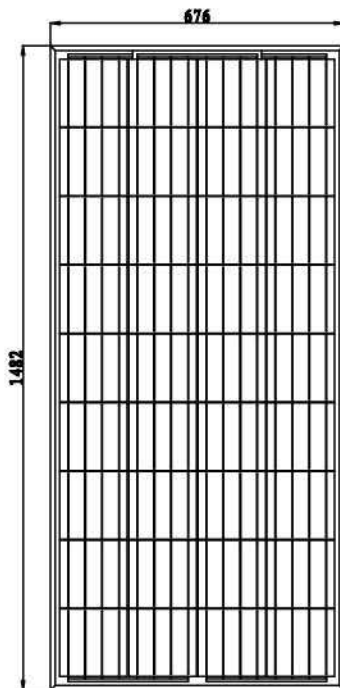